


Product Construction

	<u>Conveying Side</u>	<u>Pulley Side</u>	
Color	1 Green	3 Black	
Material	1 NBR Rubber (Buna N/Nitrile)	3 Hamid Elastomer	
Type of Surface	1 Fine Structure	3 Smooth Cover	
Amount of Grip	1 Low Grip	3 Low Grip	
Traction Layer	2 Polyamid Elastomer		
		Coefficient of Friction	0.2
		Suitable for Slider Bed	Yes

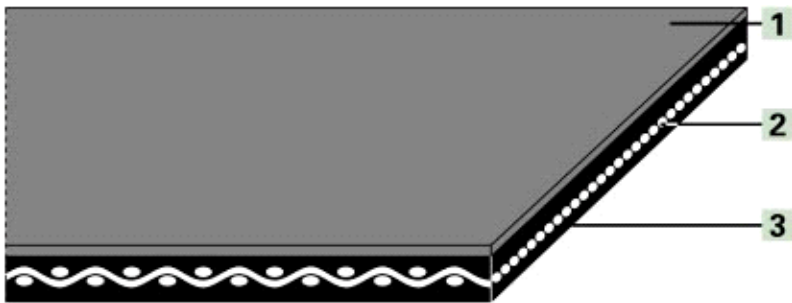

Flexibility and Strength

Allowable Working Tension (lbs piw)	71
Number of Plies	1
Thickness (inch)	0.05
Minimum Pulley Diameter	0.8
Minimum Pulley Diameter with Reverse Bend	0.8
Suitable for Troughing	No

Heat, Chemical and Electric

Min Operating Temp (°F)	-4
Max Operating Temp (°F)	140
Oil Resistance	Moderate Resistance
Conductivity	Anti-Static